

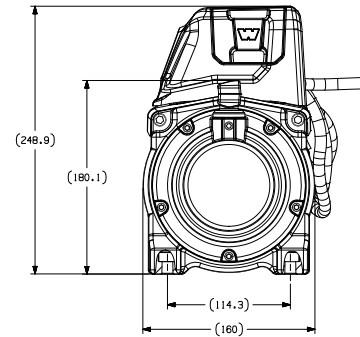
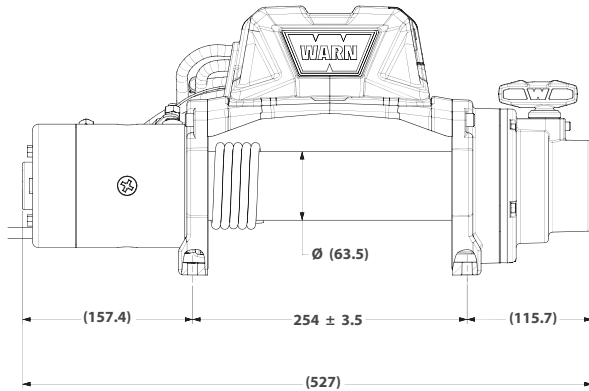


	Tabor/VR 8	Tabor/VR 8s	Tabor /VR/Magnum 10	Tabor /VR/Magnum 10s	Tabor 10-24v	Tabor /VR/Magnum 12	Tabor /VR/Magnum 12s	Tabor 12-24v
Rated Line Pull	8000 lbs. (3629 kgs)	8000 lbs. (3629 kgs)	10000 lbs. (4536 kgs)	10000 lbs. (4536 kgs)	10000 lbs. (4536 kgs)	12000 lbs. (5443 kgs)	12000 lbs. (5443 kgs)	12000 lbs. (5443 kgs)
Motor	12V DC, Series Wound	12V DC, Series Wound	12V DC, Series Wound	12V DC, Series Wound	24V DC, Series Wound	12V DC, Series Wound	12V DC, Series Wound	24V DC, Series Wound
Controls	Remote switch, 12” (3.7m) Lead	Remote switch, 12” (3.7m) Lead	Remote switch, 12” (3.7m) Lead	Remote switch, 12” (3.7m) Lead	Remote switch, 12” (3.7m) Lead	Remote switch, 12” (3.7m) Lead	Remote switch, 12” (3.7m) Lead	Remote switch, 12” (3.7m) Lead
Gear Train	3-Stage Planetary	3-Stage Planetary	3-Stage Planetary	3-Stage Planetary	3-Stage Planetary	3-Stage Planetary	3-Stage Planetary	3-Stage Planetary
Gear Ratio	162:1	162:1	216:1	216:1	216:1	216:1	216:1	216:1
Clutch (Freespool)	Rotating Ring Gear	Rotating Ring Gear	Sliding Ring Gear	Sliding Ring Gear	Sliding Ring Gear	Sliding Ring Gear	Sliding Ring Gear	Sliding Ring Gear
Brake	Automatic Direct Drive Cone	Automatic Direct Drive Cone	Automatic Direct Drive Cone	Automatic Direct Drive Cone	Automatic Direct Drive Cone	Automatic Direct Drive Cone	Automatic Direct Drive Cone	Automatic Direct Drive Cone
Drum Diameter/Length	2.5”/9.0” (6.4cm/23cm)	2.5”/9.0” (6.4cm/23cm)	2.5”/9.0” (6.4cm/23cm)	2.625”/9.0” (6.7cm/23cm)	2.625”/9.0” (6.7cm/23cm)	2.5”/9.0” (6.4cm/23cm)	2.625”/9.0” (6.7cm/23cm)	2.625”/9.0” (6.7cm/23cm)
Kit Shipping Weight	65 lbs. (36.3 kgs)	54 lbs. (36.3 kgs)	75 lbs. (40.4 kgs)	59 lbs. (40.4 kgs)	75 lbs. (40.4 kgs)	76 lbs. (40.4 kgs)	62 lbs. (40.4 kgs)	76 lbs. (40.4 kgs)
Rope	Wire rope, Ø 5/16” x 94’ (Ø 10mm x 29m)	Synthetic rope, Ø 3/8” x 90’ (Ø 8mm x 27.4m)	Wire rope, Ø 3/8” x 80’ (Ø 10mm x 29m)	Synthetic rope, Ø 3/8” x 90’ Ø 8mm x 27.4m)	-	Wire rope, Ø 3/8” x 80’ (Ø 10mm x 29m)	Synthetic rope, Ø 3/8” x 90’ Ø 8mm x 27.4m)	-
Fairlead	Roller (Tabor) Hawse (VR)	Hawse	Roller (Tabor, Magnum) Hawse (VR)	Hawse	-	Roller (Tabor, Magnum) Hawse (VR)	Hawse	-
Recommended Battery	650CCA Minimum for winching	650CCA Minimum for winching	650CCA Minimum for winching	650CCA Minimum for winching	650CCA Minimum for winching	650CCA Minimum for winching	650CCA Minimum for winching	650CCA Minimum for winching
Duty Cycle	Intermittent	Intermittent	Intermittent	Intermittent	Intermittent	Intermittent	Intermittent	Intermittent
Battery Leads	25mm, 72” (1.83m)	25mm, 72” (1.83m)	25mm, 72” (1.83m)	25mm, 72” (1.83m)	25mm, 72” (1.83m)	25mm, 72” (1.83m)	25mm, 72” (1.83m)	25mm, 72” (1.83m)
Exterior	Black Powder Coat	Black Powder Coat	Black Powder Coat	Black Powder Coat	Black Powder Coat	Black Powder Coat	Black Powder Coat	Black Powder Coat
Warranty	Limited Lifetime	Limited Lifetime	Limited Lifetime	Limited Lifetime	Limited Lifetime	Limited Lifetime	Limited Lifetime	Limited Lifetime
Mounting Bolt Pattern	10.0” x 4.5” (254mm x 114.3mm)	10.0” x 4.5” (254mm x 114.3mm)	10.0” x 4.5” (254mm x 114.3mm)	10.0” x 4.5” (254mm x 114.3mm)	10.0” x 4.5” (254mm x 114.3mm)	10.0” x 4.5” (254mm x 114.3mm)	10.0” x 4.5” (254mm x 114.3mm)	10.0” x 4.5” (254mm x 114.3mm)
Dimensions	20.80” L x 6.3” D x 9.8” H (528mm L x 160mm D x 249mm H)	20.80” L x 6.3” D x 9.8” H (528mm L x 160mm D x 249mm H)	20.80” L x 6.3” D x 9.8” H (528mm L x 160mm D x 249mm H)	20.80” L x 6.3” D x 9.8” H (528mm L x 160mm D x 249mm H)	20.80” L x 6.3” D x 9.8” H (528mm L x 160mm D x 249mm H)	21.80” L x 6.3” D x 9.8” H (554mm L x 160mm D x 249mm H)	21.80” L x 6.3” D x 9.8” H (554mm L x 160mm D x 249mm H)	21.80” L x 6.3” D x 9.8” H (554mm L x 160mm D x 249mm H)



8000/8000-S

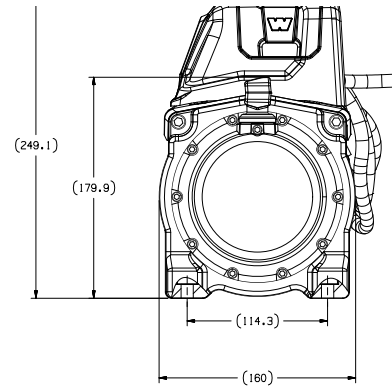

10000/10000-S

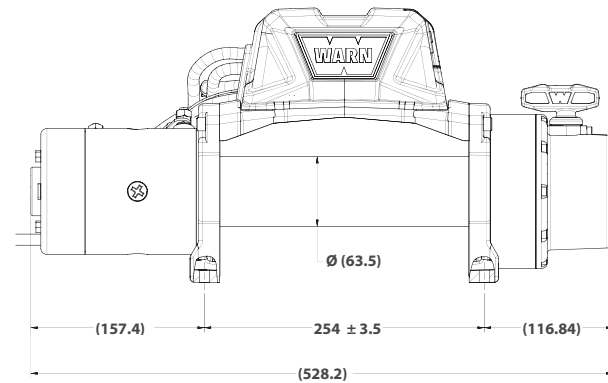

12000/12000-S

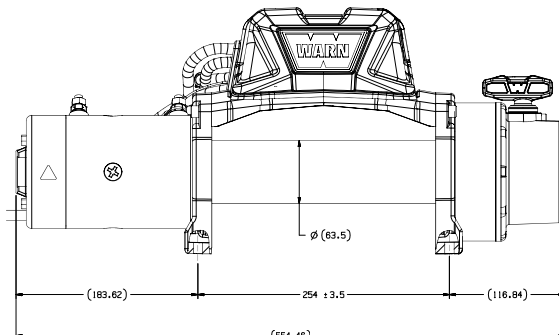


SERVICE INSTRUCTIONS

Should you encounter a problem during installation or operation of your winch, please follow these steps toward resolving the problem:

1. Refer to your operator's guide, installation instructions. It has illustrations and detailed information on the installation and safe and proper operation of your winch. If you are unable to resolve the problem, then go to step 2.
2. Contact yourTo find the nearest retailer to your location please visit our website at **<http://www.warn.com/corporate/dealerlocator.jsp>**. If, after discussing the problem with their parts and service staff, you are still unable to resolve the problem then go to step 3.
3. If you are unable to resolve the problem to your satisfaction, please call Warn Industries Customer Service at: 503-722-1200 or 1-800-543-9276 or 1-503-722-3005 (*International Fax*). When calling, please have the following information available: winch model number and purchase date, make, model and year of vehicle. You may also contact Warn Industries by visiting our website: **www.warn.com**.

Service Kits /Replacement Parts		Tabor/VR 8	Tabor/VR 8s	Tabor /VR/Magnum 10	Tabor /VR/Magnum 10s	Tabor 10-24v	Tabor /VR/Magnum 12	Tabor /VR/Magnum 12s	Tabor 12-24v
Kit #	Kit Description	Kit Number							
1	End Housing Kit	88049	88049	92083	92083	92083	92083	92083	92083
2	Drum Support Kit	88050	88050	92077	92077	92077	92077	92077	92077
3	Tie Plate Kit	97781	97781	97781	97781	97781	97781	97781	97781
4	Ring Gear Kit	88129	88129	92079	92079	92079	92081	92081	92081
5	Carrier Kit	90902	90902	92085	92085	92085	92087	92087	92087
6	Brake Kit	32455	32455	32455	32455	32455	32455	32455	32455
7	Motor Kit	900548	900548	900548	900548	97787	86537	86537	97793
8	Control Pack Kit	97771	97771	97771	97771	97773	97771	97771	97773
9	Bolt & Gasket Kit	97776	97776	97784	97784	97784	97784	97784	97784
10	Label Kit (not shown)	90796	90796	92066	92066	92066	92036	92036	92036
Item #	Kit Description	Individual Items							
11	Drum Assembly	98767	98767	98767	100608	100608	98767	100608	100608
12	Rope Assembly	86514	97782	86515	97782	86515 or 97782	86515	97782	86515 or 97782
13	Terminal Kit	16463	76226	79626	76226	79626	79626	76226	79626
14	Ground Cable	100609	100609	98399	98399	98399	98399	98399	98399
15	Remote Assembly	38626	38626	38626	38626	38626	38626	38626	38626
16	Roller Fairlead	89214	-	89214	-	89214	89214	-	89214
17	Hawse Fairlead	97900	97900	97900	97900	97900	97900	97900	97900

8000/8000-S

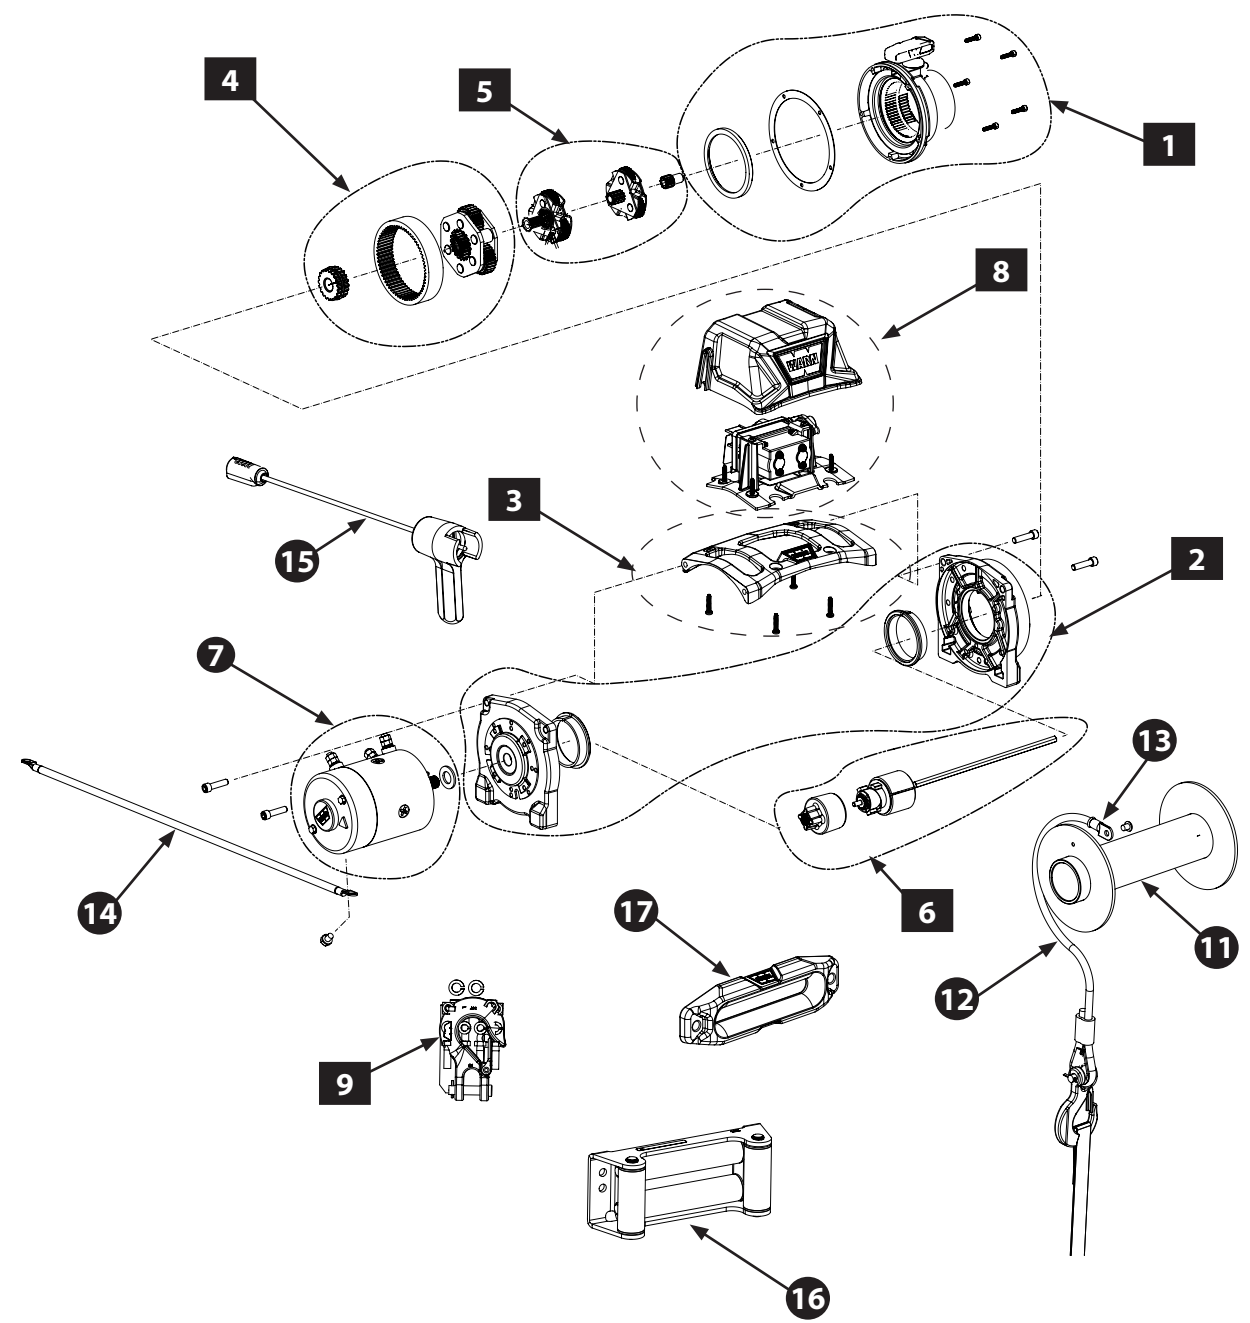

10000/10000-S AND 12000/12000-S

